


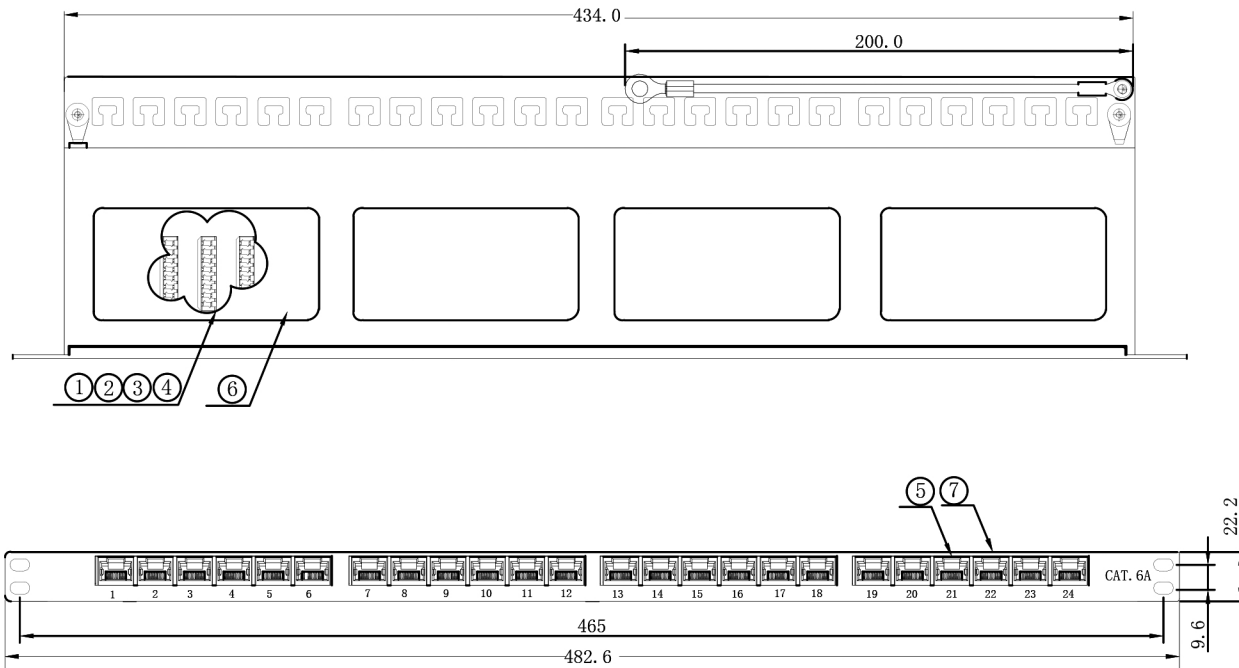

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125V AC RMS
2. CURRENT RATING : 1.5A mp
3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
6. CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 C.2
ISO/IEC 11801:2010 CLASS EA

ENVIRONMENTAL:

1. STORAGE : -40° TO+85°
2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68
- MECHANICAL
1. SHIELD MATERIAL BRASS C2680 T=0.25MM
2. HOUSING MATERIAL PBT+15%GF
3. CONTACT MATERIAL PHOSPHOR BRONZE PLATING GOLD
4. PANEL FRAME ZN PLATING
5. IDC MATERIAL: PC TERMINAL:PHOSPHOR BRONZE, TIN PLATING
6. RJ45 JACK LIFE: 750 TIMES MIN
7. IDC LIFE : 200 TIMES MIN
8. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

Accessory:

1. Cable Tie(75X1.9mm) ×24Pcs
 2. Instruction Sheet
 3. Screw and Nut M6*18mm x 2set
- RoHS2.0 & REACH COMPLIANT

Productname:

19" Patchpanel - geschirmt - CAT 6A -
24 Port - POE + fähig - 0,5 HE

UNO ITEM NO.	Colour
90ITBPP6A05G	Gray RAL 7035
90ITBPP6A05S	Black RAL 9005

MATERIAL LIST:

⑦	Bottom Panel	1.5mm thickness Metall Panel with plastic powder cladding	1	
⑥	Upper Panel Cover	1.0mm thickness Metall Panel with plastic powder cladding	1	
⑤	RJ45 Jack	Housing-Fireproof PBT Pin-8P8C gold plated	24	
④	PCB	1.6mm UL-94V0	3	
③	IDC Body	PC/ABS /With Colour Coded Printing T568A/B	24	
②	IDC Pin	Phosphor Bronze & Tinned	192	
①	IDC Terminal	For 22-24 AWG Cable	24	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK