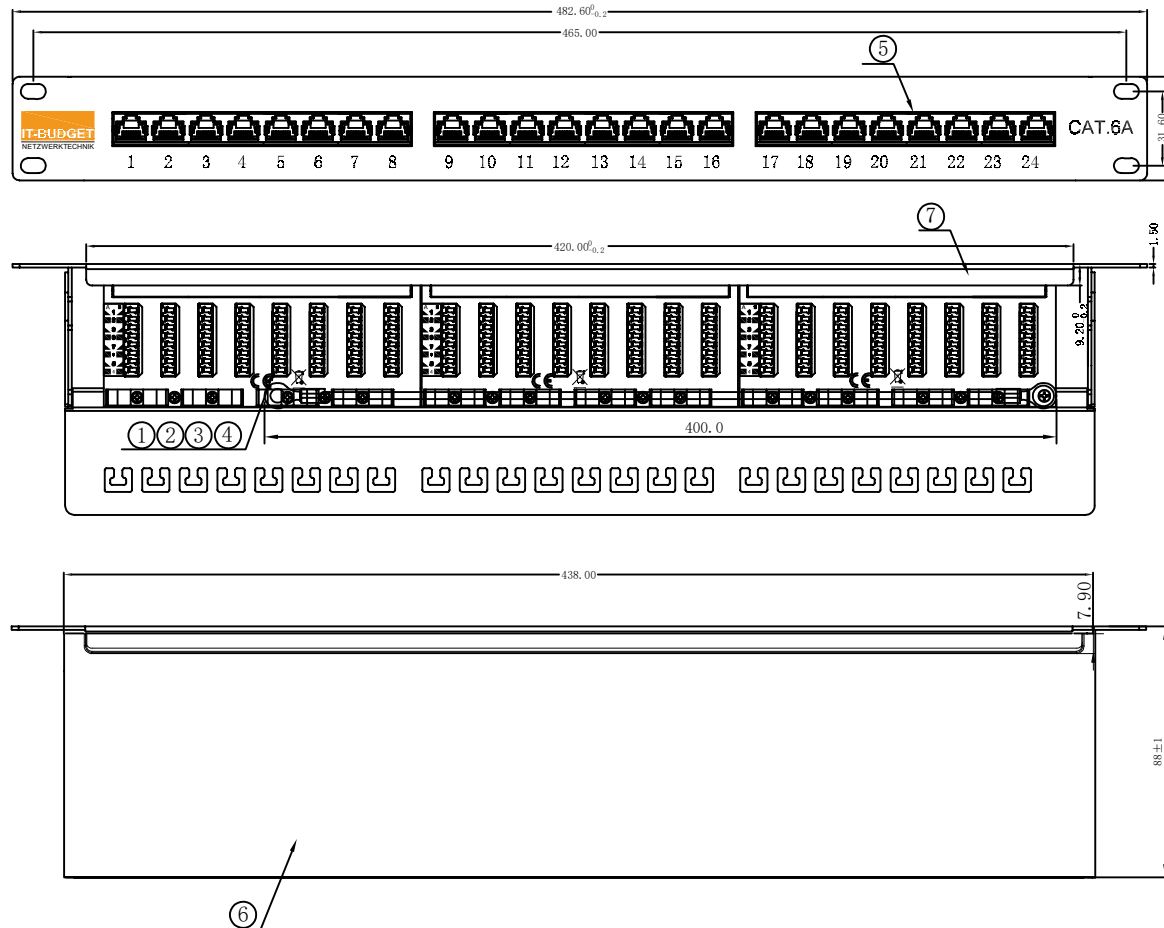


NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING : 125V AC RMS
- 2.CURRENT RATING : 1.5A mp
- 3.CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4.INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5.DIELECTRIC STRENGTH: 50W AC RMS 60Hz,1MIN
- 6.CAT.6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 C.2
ISO/IEC 11801:2010 CLASS EA

ENVIRONMENTAL:

- 1.STORAGE:-40°C TO +70°C
- 2.OPERATION:-10°C TO +60°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68 RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5

MECHANICAL:

- 1.SHIELD MATERIAL BRASS C2680 T=0.25MM
- 2.HOUSING MATERIAL PBT+15%GF
- 3.CONTACT MATERIAL PHOSPHOR BRONZE PLATING GOLD
- 4.PANEL FRAME ZN PLATING
- 5.IDC MATERIAL: PC TERMINAL:PHOSPHOR BRONZE,TIN PLATING
- 6.RJ45 JACK LIFE: 750 TIMES MIN
- 7.IDC LIFE : 200 TIMES MIN
- 8.RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

PoE per IEEE 802.3af, PoE+ per IEEE 802.3at, PoE++ per IEEE 802.3bt

Accessory:

- 1.Cable Tie(75X3mm) ×24Pcs
 - 2.Instruction Sheet
 - 3.Screw and Nut M6*18mm x 4set RoHS2.0
- & REACH COMPLIANT

Material List:

⑦	Bottom Panel	1.5mm thickness Metall Panel with plastic powder cladding	1	
⑥	Upper Panel Cover	1.0mm thickness Metall Panel with plastic powder cladding	1	
⑤	RJ45 Jack	Housing PBT Pin-8P8C gold plated	24	
④	PCB	1.6mm/With T568A/B label	3	
③	IDC Body	PC/ABS With Coded Printing T568A/B	24	
②	IDC Pin	Phosphor Bronze & Tinned	192	
①	IDC Terminal	For 22-26 AWG Cable	24	
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARK

Product name:

IT-BUDGET 19"
Patchpanel Profi S - kurze
Bauform - geschirmt -
Cat.6A - 24 Port - PoE+
fähig - 1 HE

ITEM No.	Colour
90ITBPP6A1G	Gray RAL 7035
90ITBPP6A1S	Black RAL 9005